

**Class XI (Session 2024-25)**

**Marking Scheme**

**Subject - Physics**

**SECTION - A**

1.	I)	10m	1
2.	ii)	ZERO	1
3.	ii)	60°	1
4.	iv)	ZERO	1
5.	iii)	10N	1
6.	ii)	9J	1
7.	ii)	decreases	1
8.	ii)	decreases	1
9.	iv)	$T \propto R^{3/2}$	1
10.		ZERO	1
11.		Bulk Modules	1
12.		Hooke's law	1
13.		8 : 1	1
14.		Joule / kg	1
15.		$\gamma = 3\alpha$	1
16.		(d)	1
17.		(d)	1
18.		(d)	1

**SECTION - B**

19.	By PRINCIPLE OF HOMOGENEITY	2
	a = [L]	(1+1)
	b = [LT <sup>-1</sup> ]	
20.	<p>We know that : <math>n_1 u_1 = n_2 u_2</math></p> $n_2 = n_1 \frac{u_1}{u_2} = n_1 \frac{[M_1^a L_1^b T_1^c]}{[M_2^a L_2^b T_2^c]}$ $= n_1 \left[ \frac{M_1}{M_2} \right]^a \left[ \frac{L_1}{L_2} \right]^b \left[ \frac{T_1}{T_2} \right]^c$ <p>SI System New system</p> <p><math>n_1 = 4.2</math> <math>n_2 = ?</math></p> <p><math>M_1 = 1 \text{ kg}</math> <math>M_2 = \alpha \text{ kg}</math></p> <p><math>L_1 = 1 \text{ m}</math> <math>L_2 = \beta \text{ m}</math></p> <p><math>T_1 = 1 \text{ s}</math> <math>T_2 = \gamma \text{ s}</math></p> <p><math>1 \text{ cal} = 4.2 \text{ J} = 4.2 \text{ kg m}^2 \text{ s}^{-2} \therefore a = 1, b = 2, c =</math></p> $\therefore n_2 = 4.2 \left[ \frac{1 \text{ kg}}{\alpha \text{ kg}} \right]^1 \left[ \frac{1 \text{ m}}{\beta \text{ m}} \right]^2 \left[ \frac{1 \text{ s}}{\gamma \text{ s}} \right]^{-2}$ $\therefore n_2 = 4.2 \alpha^{-1} \beta^{-2} \gamma^2$ <p><math>\therefore 1 \text{ cal} = 4.2 \alpha^{-1} \beta^{-2} \gamma^2</math> in new system</p>	<p>1/2</p> <p>1/2</p> <p>1/2</p> <p>1/2</p>

21.  $W = \text{F.S.}$  1  
 $= (3i + 4j + 5k) \cdot (5i + 4j + 3k)$   
 $= 15 + 16 + 13$   
 $= 46 \text{ Joule}$  1

**OR**

Relation between K.E. and linear Momentum. 1

$$P = \sqrt{2mE}$$

KE of Lighter body will be greater because  $KE \propto \frac{1}{\text{mass}}$  1

22. Coefficient of restitution is defined as the ratio of the magnitude of velocity of separation and magnitude of velocity of approach. 1+1

For Elastic Collision  $e = 1$

23. Maximum mass that can be lifted,  $m = 3000 \text{ kg}$

Area of cross-section of the load-carrying piston,  $A = 425 \text{ cm}^2 = 425 \times 10^{-4} \text{ m}^2$  1/2

The maximum force exerted by the load,  $F = mg = 3000 \times 9.8 = 29400 \text{ N}$  1/2

The maximum pressure on the load-carrying piston,  $P = F / A$  1/2

$P = 6.917 \times 10^5 \text{ Pa}$  1/2

24. At room temperature,  $T = 270 \text{ C} = 300 \text{ K}$  1/2

Average thermal energy  $= (3/2) kT$  1/2

Where,

$k$  is the Boltzmann constant  $= 1.38 \times 10^{-23} \text{ m}^2 \text{ kg s}^{-2} \text{ K}^{-1}$

Hence,

$(3/2) kT = (3/2) \times 1.38 \times 10^{-23} \times 300$  1/2

On calculation, we get

$= 6.21 \times 10^{-21} \text{ J}$  1/2

25.  $T = 80 \text{ N}$

$l = .50 \text{ metre}$

$m = 4 \times 10^{-3} \text{ kg}$


$$v = \sqrt{\frac{T}{\mu}}$$
 1

Where

$u = \text{mass per unit length} = \frac{4 \times 10^{-3}}{.50} = 8 \times 10^{-3} \text{ kg/metre}$  1/2

$v = \sqrt{\frac{80}{8 \times 10^{-3}}} = 10 \text{ m/s}$  1/2

**SECTION - C**

26.  1  
1  
1

27. Expression for centre of Mass 3

$$r = \frac{m_1 r_1 + m_2 r_2 + m_3 r_3}{m_1 + m_2 + m_3}$$

28. Moment of inertia is the sum of the product of the mass of every particle with its square of the distance from the axis of rotation. We know, kinetic energy 1

$$(E) = \frac{1}{2} m v^2 \quad \text{1/2}$$

As  $v = \omega r$

So

$$E = \frac{1}{2} m (r^2 \omega^2) \quad \text{1/2}$$

$$\Rightarrow E = \frac{1}{2} I \omega^2 \quad \text{1}$$

$$[\because I = m r^2]$$

which is required relationship between kinetic energy of rotation and moment of inertia.

29. Kepler's Laws of Planetary Motion They describe how 1+1+1

- 1) planets move in elliptical orbits with the Sun as a focus,
- 2) a planet covers the same area of space in the same amount of time no matter where it is in its orbit, and
- 3) a planet's orbital period is proportional to the size of its orbit.

**OR**

Orbital velocity ( $V_o$ ): Velocity of a satellite moving in orbit is called orbital velocity ( $V_o$ ).

Let a satellite of mass  $m$  is revolving round the earth in a circular orbit at a height  $h$  above the ground.

Radius of the orbit  $= R+h$  where  $R$  is radius of earth.

In orbit motion is "The centrifugal and centripetal forces acting on the satellite".

$$\text{Centrifugal force} = \frac{mV^2}{r} = \frac{mV_o^2}{R+h} \dots\dots\dots(1)$$

Centripetal force is the force acting towards the centre of the circle it is provided by gravitational force between the planet and satellite.

$$\therefore F = \frac{GM}{(R+h)^2} \dots\dots\dots(2)$$

$$(1) = (2) \frac{mV_o^2}{(R+h)} = \frac{GM}{(R+h)^2}$$

$$\therefore V_o^2 = \frac{GM}{R+h} \text{ or } V_o = \sqrt{\frac{GM}{R+h}}$$

When  $h \ll R$  then orbital velocity,

$V_o = \sqrt{gR}$  is called orbital velocity. Its value is 7.92 km/sec.

1

1

1

30. An adiabatic process is defined as. The thermodynamic process in which there is no exchange of heat from the system to its surrounding neither during expansion nor during compression. 1+2

**ANSWER**

Adiabatic process:  $PV^\gamma = K$

So,  $P = KV^{-\gamma}$

Work done  $W = \int PdV$

Or  $W = \int KV^{-\gamma} dV$

Or  $W = K \times \frac{V^{-\gamma+1}}{1-\gamma} \Big|_{V_1}^{V_2}$

Or  $W = \frac{K}{1-\gamma} \times [V_2^{-\gamma+1} - V_1^{-\gamma+1}]$

Or  $W = \frac{1}{1-\gamma} \times [KV_2^{-\gamma+1} - KV_1^{-\gamma+1}]$

Or  $W = \frac{1}{1-\gamma} \times [P_2V_2^\gamma V_2^{-\gamma+1} - P_1V_1^\gamma V_1^{-\gamma+1}]$

Or  $W = \frac{P_2V_2 - P_1V_1}{1-\gamma}$

**OR**

Isothermal process is a thermodynamic process in which the temperature of a system remains constant. The transfer of heat into or out of the system happens so slowly that thermal equilibrium is maintained. 1+2

Suppose 1 mole of gas is enclosed in isothermal container. Let  $P_1, V_1, T$  be initial pressure, volumes and temperature. Let expand to volume  $V_2$  &

pressure reduces to  $P_2$  & temperature remain constant. Then, work done is given by

$$W = \int dW$$

$$W = \int_{V_1}^{V_2} P dV$$

as  $PV = RT$  ( $n = \text{mole}$ )

$$P = \frac{RT}{V}$$

$$W = \int_{V_1}^{V_2} \frac{RT}{V} dV$$

$$W = RT \int_{V_1}^{V_2} \frac{dV}{V}$$

$$= RT [\ln V]_{V_1}^{V_2}$$

$$= RT [\ln V_2 - \ln V_1]$$

$$W = RT \ln \frac{V_2}{V_1}$$

$$W = 2.303RT \log_{10} \frac{V_2}{V_1}$$

31. (I) Let  $H$  be the maximum height reached by the projectile in time  $t_1$ . For vertical motion,  $2\frac{1}{2}$   
 The initial velocity =  $u \sin \theta$   
 The final velocity =  $0$   
 Acceleration =  $-g$   
 $\therefore$  using,  $v^2 = u^2 + 2as$   
 $0 = u^2 \sin^2 \theta - 2gH$   
 $2gH = u^2 \sin^2 \theta$   
 $H = \frac{u^2 \sin^2 \theta}{2g}$
- (ii) Let  $t_1$  be the time taken by the projectile to reach the maximum height  $H$ . For vertical motion,  $2\frac{1}{2}$   
 initial velocity =  $u \sin \theta$   
 Final velocity at the maximum height =  $0$   
 Acceleration  $a = -g$   
 Using the equation  $v = u + at_1$   
 $0 = u \sin \theta - gt_1$   
 $gt_1 = u \sin \theta$   
 $t_1 = \frac{u \sin \theta}{g}$   
 Let  $t_2$  be the time of descent.  
 But  $t_1 = t_2$   
 i.e. time of ascent = time of descent.  
 $\therefore$  Time of flight  $T = t_1 + t_2 = 2t_1$   
 $\therefore T = \frac{2u \sin \theta}{g}$

OR


The triangle law for vector addition states that if two vectors are represented by two sides of a triangle taken in order, then their vector sum is represented by the third side of the triangle taken in the opposite direction.

(1) **Magnitude of resultant vector**

In  $\triangle ABN$ ,  $\cos \theta = \frac{AN}{B} \therefore AN = B \cos \theta$

$\sin \theta = \frac{BN}{B} \therefore BN = B \sin \theta$

In  $\triangle OBN$ , we have  $OB^2 = ON^2 + BN^2$

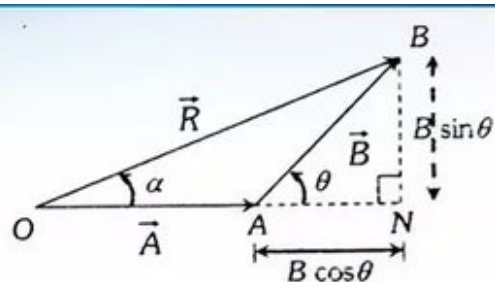

$$R^2 = (A + B \cos \theta)^2 + (B \sin \theta)^2$$

$$R^2 = A^2 + B^2(\cos^2 \theta + \sin^2 \theta) + 2AB \cos \theta$$

$$R = \sqrt{A^2 + B^2 + 2AB \cos \theta}$$

32.

Bernoulli's principle states that an increase in the speed of a fluid occurs simultaneously with a decrease in static pressure or a decrease in the fluid's potential energy.

1

To prove Bernoulli's theorem, consider a fluid of negligible viscosity moving with laminar flow, as shown in Figure.

Let the velocity, pressure and area of the fluid column be  $p_1$ ,  $v_1$  and  $A_1$  at Q and  $p_2$ ,  $v_2$  and  $A_2$  at R. Let the volume bounded by Q and R move to S and T where  $QS = L_1$ , and  $RT = L_2$ .



1

If the fluid is incompressible:

The work done by the pressure difference per unit volume = gain in kinetic energy per unit volume + gain in potential energy per unit volume. Now:

$$A_1 L_1 = A_2 L_2$$

1

Work done is given by:

$$W = F \times d = p \times \text{volume}$$

$$\Rightarrow W_{\text{net}} = p_1 - p_2$$

$$\Rightarrow K.E = \frac{1}{2}mv^2 = \frac{1}{2}V\rho v^2 = \frac{1}{2}\rho v^2 (\because V = 1)$$

1

$$\Rightarrow K.E_{\text{gained}} = \frac{1}{2}\rho(v_2^2 - v_1^2)$$

$$P_1 + \frac{1}{2}\rho v_1^2 + \rho gh_1 = P_2 + \frac{1}{2}\rho v_2^2 + \rho gh_2$$

$$\therefore P + \frac{1}{2}\rho v^2 + \rho gh = \text{const.}$$

1

**OR**

Newton's law of cooling states that the rate at which an object cools is proportional to the difference in temperature between the object and the object's surroundings,

Proof/Derivation

1+4

33. Limiting friction is described as the friction created when two static surfaces come into contact with each other

1

LAWS :

1) The direction of limiting friction force is always opposite the direction of motion.

1

2) It always acts tangential to the two surfaces.

1


3) It is dependent on the material and the nature of the surfaces in contact.

1

4) It is independent of the shape and area.

1

**OR**

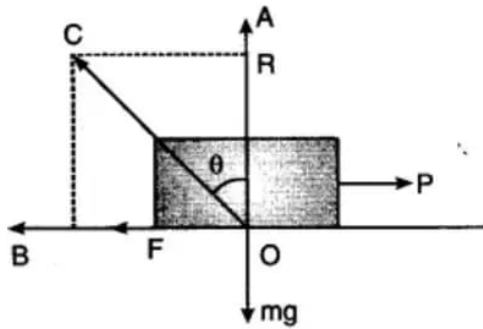

2

**Relation :**

In  $\Delta AOC$   $\tan \theta = \frac{AC}{OA} = \frac{OB}{OA} = \frac{F}{R} = \mu$

2

Hence  $\mu = \tan \theta$

1

Coefficient of static friction:  $\mu = \tan(\theta)$ , where  $\mu$  is the coefficient of friction and  $\theta$  is the angle

34. i) (d) 5 1  
 ii) (a) He 1  
 iii) The number of independent ways in which a molecule of gas can move is called the degree of freedom. 2

**OR**

The law of equipartition of energy states that “For a system which is in thermal equilibrium, its total energy is divided equally among the degree of freedom.” 2

35. i) (d) Restoring Force 1  
 ii) (a) Periodic Motion 1  
 iii) Simple harmonic motion is defined as a periodic motion of a point along a straight line, such that its acceleration is always towards a fixed point in that line and is proportional to its distance from that point. 2

**OR**

Seconds pendulum: a pendulum requiring exactly one second for each swing in either direction or two seconds for a complete vibration and having a length between centres of suspension and oscillation of 99.353 centimetre 2